


STRAIGHT ALUM. SQUARE POLE

- **SHAFT:** Straight aluminum 6063 alloy extrusion. Internal welding pole shaft to base.
 - **WALL:** .125" .188" and .250" Gauge aluminum.
 - **BASE:** Aluminum 10'-20' poles at 3/4" thickness. 22' & over at 1" thickness.
 - 9'-12' bolt circle. 4 bolt pattern
 - **ANCHOR BOLTS:** Hot dipped galvanized. 3/4" x 30" 4" J hook. 1" x 36" - 4" J hook.
 - **FINISH:** 3 to 5 mils
- powder coat finish. Galvanized available upon request.
- **HAND HOLE:** included
 - **POLE CAP:** included
 - **CUSTOM BOLT CIRCLE:** no anchor bolts provided
 - **TEMPLATE:** available with anchor bolts

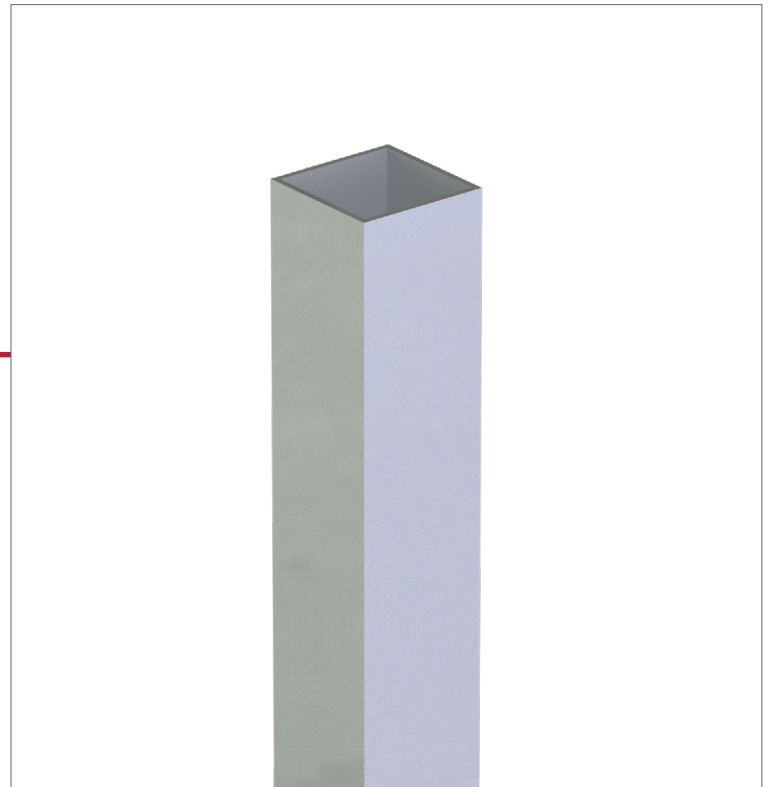

MODEL	HEIGHT	SIZE / GAUGE	BASE	MOUNT	FINISH	OPTIONS
SAS	10'	4125 - 4" SQ .125G (10-15' Poles Only)	9BC - 9" Bolt Circle	NOD - No Drill	BZ - Bronze	G - Galvanize
	12'	4188 - 4" SQ .188G	12BC - 12" Bolt Circle (39' Only)	S - Single	DBRZ - Dark Bronze	GFI - GFI Provision
	15'	4250 - 4" SQ .250G		D180 - Double 180°	BLK - Black	LAB - No Anchor Bolts
	18'	5188 - 5" SQ .188G	D90 - Double 90°	WH - White	MG - Marine Grade Paint	
	20'	5250 - 5" SQ .250G	T - Triple 90°	SLV - Silver	RBP - Round Base Plate	
	25'	(25' & 30' Poles Only)	Q - Quads 90°			
	30'		T238 - Tenon 2-3/8"			
		T234 - Tenon 2-3/4"				
		T3 - Tenon 3"				
		T312 - Tenon 3-1/2"				
		T412 - Tenon 4-1/2"				
		T512 - Tenon 5-1/2"				

PROJECT NAME:

FEATURES & SPECIFICATIONS

MODEL	NOMINAL HEIGHT	SIZE / THICKNESS	EPA 80MPH	EPA 90MPH	EPA 100MPH	BOLT CIRCLE	ANCHOR BOLTS
SAS104125	10	4"OD / .125"t	11.3	8.4	6.2	9	3/4x30 + 4
SAS124125	12	4"OD / .125"t	12.2	9	6.7	9	3/4x30 + 4
SAS154125	15	4"OD / .125"t	7.8	5.4	3.7	9	3/4x30 + 4
SAS154188	15	4"OD / .188"t	11.8	8.5	6.2	9	3/4x30 + 4
SAS184188	18	4"OD / .188"t	9	6.2	4.2	9	3/4x30 + 4
SAS120188	20	4"OD / .188"t	6.8	4.4	2.7	9	3/4x30 + 4
SAS205188	20	5"OD / .188"t	13.4	9.3	6.4	9	3/4x30 + 4
SAS255188	25	5"OD / .188"t	7	4	2	12	1x36 + 4

